





JL S Series- 2

Technical Specification

- Cyclone type aluminium die-cast heat sink
- Die-cast aluminium trim.
- High transmit Acrylic diffuser with no glare.
- SMD LED power: 6W, 9W, 15W, 20W, 24W
- Color Temp. (options): 3000 K - 5000 K
- CRI: ≥ 80

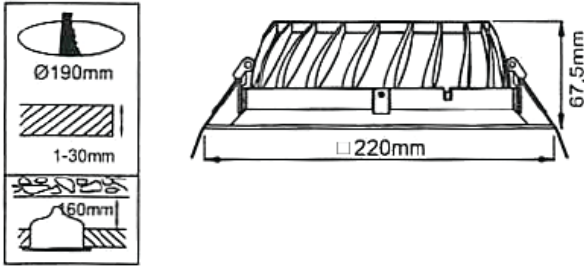


The light intensity distribution curve of polar coordinate

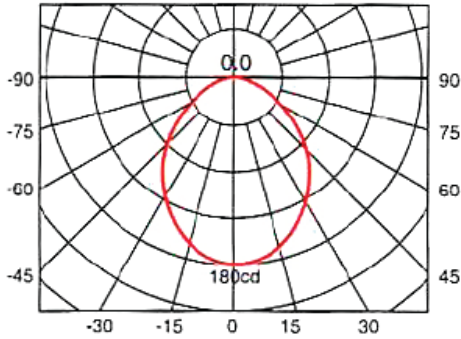

6W

The light intensity distribution curve of polar coordinate

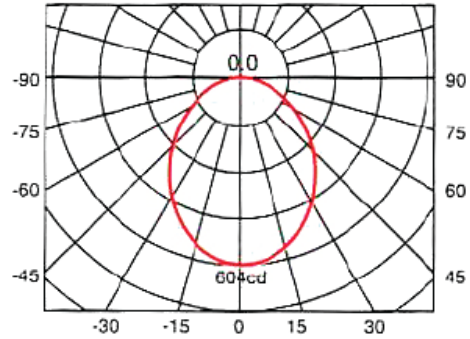

24W

Model	Wattage	Beam Angle	Lumen	Dimension (mm)	Cut Out (mm)
DLS-06-12-JL3001S	6W	120°	450	110 x10 x38	Ø95
DLS-09-12-JL4001S	9W		630	140 x140 x53.8	Ø120
DLS-15-12-JL5001S	15W		1050	180 x180 x56	Ø150
DLS- 20-12-JL 6001S	20W		1400	200 x200 x61.7	Ø175
DLS- 24-12-JL8001S	24W		1680	220 x220 x67.5	Ø190

