

HB Series-3



Technical Specification

Luminous flux: 6500 Lm / 7650 Lm
7500 Lm / 9000 Lm

Power Factor: >0.95PF

Operating Temperature: -20°~+45°C

Storage Temperature: -20°~+45°C

Consumption per hour: 0.09KW.H / 0.11KW .H





Mounting Height: 4~7m / 4~10 m
4~8m / 4~10 m

Light Source: COB / SMD3535

Total current harmonics:<20%

Number of LED: 3 / 56 / 70

LED'S Operating Life : >50000 Hour s

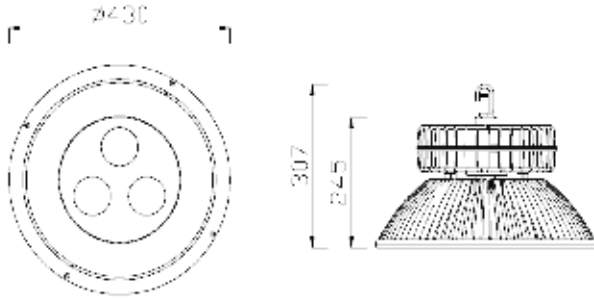

60°

90°

120°

Model	Power	Rated Voltage	Beam Angle	Color Temperature	CRI	Light Efficiency
HBC-75- YS531A	75W	AC 100~240 V	60°/ 90°	3000-6000 K	>70 RA	770
HBC-90- YS531A	90 W					
HBC-85- YS531B	85W					
HBC-100- YS531B	100 W					