



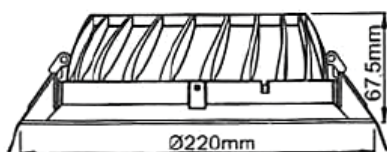


JL S Series- 1

Technical Specification

- Cyclone type aluminium die-cast heat sink
- Die-cast aluminium trim
- High transmit Acrylic diffuser with no glare
- SMD LED power: 6W, 9W, 15W, 20W, 24W
- Color Temp. (options): 3000 K - 5000 K
- CRI: ≥80




The light intensity distribution curve of polar coordinate

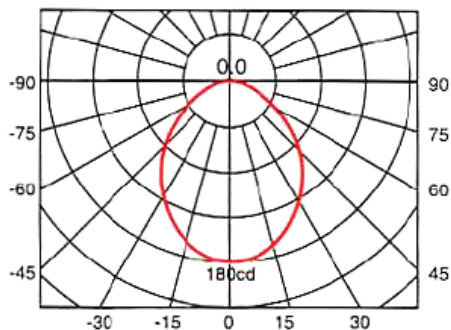

6W

The light intensity distribution curve of polar coordinate

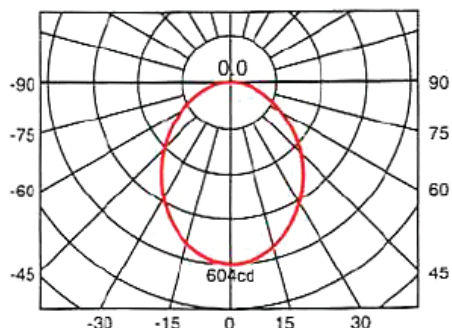

24W

Model	Wattage	Beam Angle	Lumen	Dimension (mm)	Cut Out (mm)
DLS-06-12-JL3001	6W	120°	450	∅110 x38	∅95
DLS-09-12-JL4001	9W		630	∅140 x53.8	∅120
DLS-15-12-JL5001	15W		1050	∅180 x56	∅150
DLS-20-12-JL 6001	20W		1400	∅200 x61.7	∅175
DLS-24-12-JL8001	24W		1680	∅220 x67.5	∅190

