




## FL Series-3

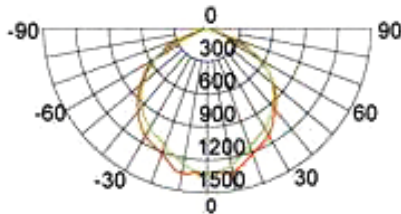

### Product Characteristic:

- High pressure die-casting aluminium housing, with the capability of impact resistance and long lifetime, just need to loosen the screws of the frames to open the light fixture and maintain the light source;
- Sealing gasket: heatproof silicon sealing gasket surround the slots of whole housing providing high performance of protection against moisture and contaminant;
- Reflector: high purity mirror aluminium symmetric reflector by external anodic oxidation treatment, with good performance of reflecting effect;
- Installation: heavy-duty stainless steel bracket suitable for pendant mounted or ceiling mounted, optional for kinds of projection angle adjustment.

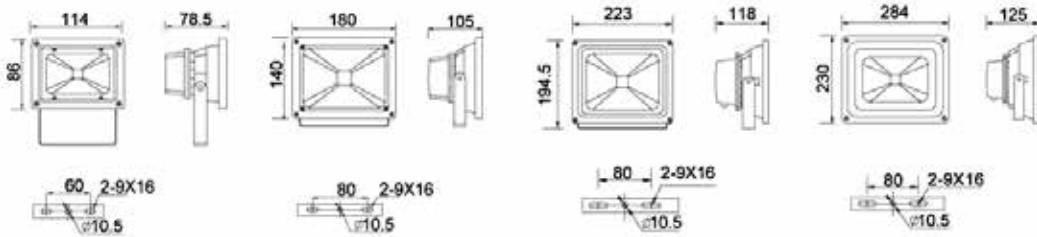

Model	Power	Light Efficiency	Color Temperature
FLC-10- YS306 A	10W/AC90- 277V	>100 lm/W	4000 K, 5000 K, 6000 K
FLC-20- YS306 B	20W/AC90- 277V		
FLC-30- YS306 C	30W/AC90- 277V		
FLC-50- YS306 D	50W/AC90- 277V		