



LF Series- 1

Product Features

Dimensions (D x w) : 5000 mm x 12mm / Reel

Weight: 120 g

Storage temperature: 0 °C ~ +60 °C


Humidity: 40% ~ 70% R

Operating temperature: -20 °C ~ +45 °C

Fire Retardant, Anti-UV

LED Life : 30,000 hrs

Other IP ratings available on request

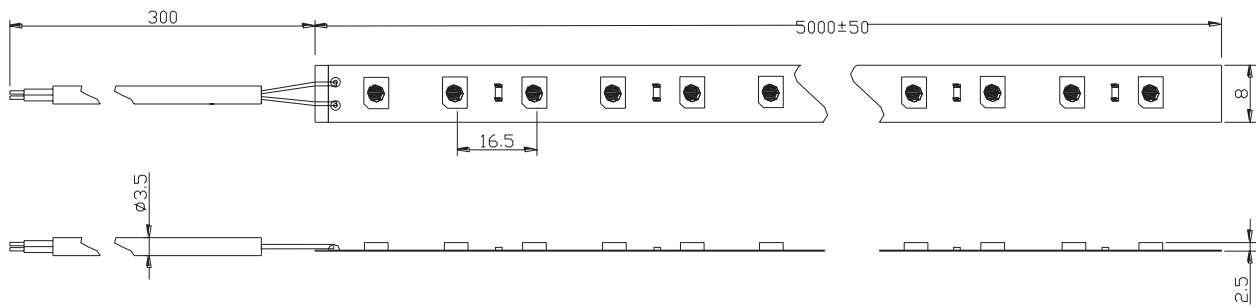

| Model No . | Color | Color Temperature | Luminous Flux | # LEDs | Voltage [V DC] | Power [W / M] | Packaging |
|---|------------------------|-------------------|---------------|--------|----------------|---------------|-----------|
| LFS-WW -FL S103T53 FW120 B- 24(WCP) | RGB + Warm White | 2700 k 3000 k | 720 lm/m | 600 | 24 | 19.2 | 5M / Reel |
| LFS- WW -FL S103T53 FN120 B- 24(WCP) | RGB + Neutral White | 3800 k 4400 k | | | | | |
| LFS- WW -FL S103T53 FS120 B- 24(WCP) | RGB + White | 5500 k 6500 k | | | | | |