



## BL Series- 1

### Technical Specification

LED Cree , CRI > 80 .

Die casting Aluminium powder coating .

Stainless Steel Bezel.

T=6 mm Tempered Glass .


External Auto addressing DMX512 decoder available.

Standard DMX Interface : Common +.


Mounting Sleeve : POM

Transparent glass or Diffused glass

Ø 10.5cm Stainless Steel Chamfered Bezel.

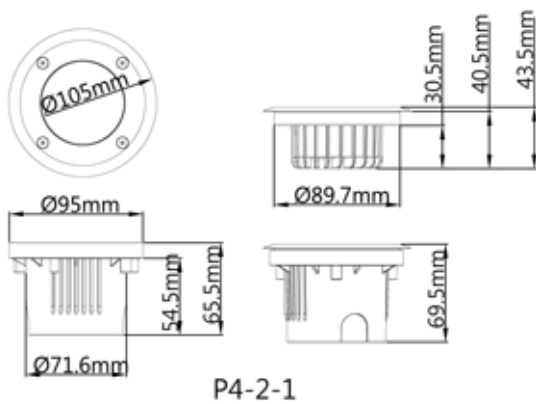

P4-2-1

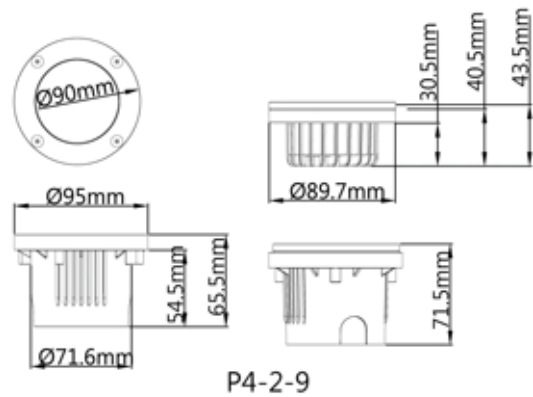

P4-2-9

Product	Dimension (mm)	LED Quality	Watt (W)	Voltage (V)	Beam Angle
BLC-P4- 2-1L18/ 02	Ø105x43.4	Lamp x 18	2 / 4	DC24V / AC100~230 V	30°/ 60°/ 100°
BLC-P4- 2-1-S 06/02		SMD x 6			120°
BLC-P4- 2-1-H 03/03	Ø105x43.4	1WHP x 3	3	DC12V	15°/25°/45°/ 65°/ 120°
BLC-P4- 2-1-H 03/03				DC5V	
BLC-P4- 2-9-L18/ 02	Ø90x43.4	Lamp x 18	2 / 4	DC24V / AC100~230 V	30°/ 60°/ 100°
BLC-P4- 2-9-S 06/02		SMD x 6			120°
BLC-P4- 2-9-H 03/03		1WHP x 3	3	DC12V	15°/25°/45°/ 65°/ 120°
BLC-P4- 2-9-H 03/03				DC5V	